


NEOHANDLER
modula

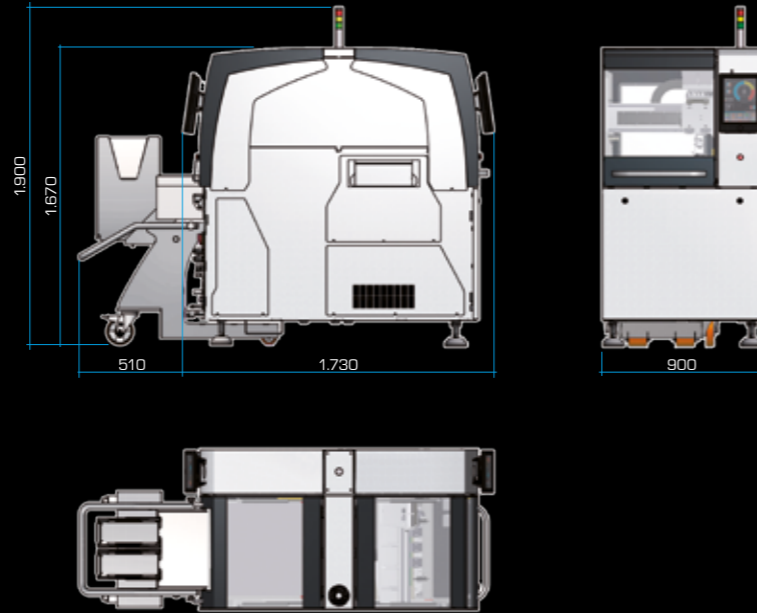

MEMS TEST HANDLER

Up to 25.000 UPH

@ 10s test time




The specifications given in this document represent the state of engineering at the time of publishing. Osai reserves the right to make modifications on the specifications and materials.

 **Osai**
automation systems

OSAI A.S. S.p.A. Via Cartiera, 4 - 10010 Parella (TO) - ITALY / Tel: +39 0125 66.83.11 Fax: +39 0125 66.83.01
www.osai-as.com - sales@osai-as.com

 **Osai**
automation systems

NEOHANDLER
modula

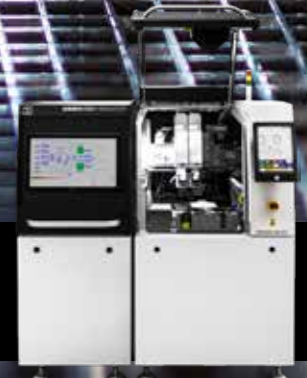

STIMULI

**MICROSPEAKER
STIMULUS**




MICROPHONE

**MAGNETIC FIELD
GENERATOR**



MAGNETOMETER

**TWIST AND
TILT TABLE**



**ACCELEROMETER
AND GYROSCOPE**

**CONTROLLED PRESSURE
CHAMBER**




PRESSURE

**CONTROLLED HUMIDITY
CHAMBER**



HUMIDITY

**FAST TEMPERATURE
CONDITIONING**



TEMPERATURE

**GAS
CONDITIONING**



GAS




• High Throughput • Low Footprint (0,9x1,7 m) • Fully Scalable • Dynamic 3Temp Capabilities • Ready for 1x1 mm size • Fast Input / Output Set up (Jedec Tray, T&R, Bowl, Tube, Wafer) • Ping Pong Capabilities

PICKUP HEADS UP TO //140



CONFIGURABLE INPUT/OUTPUT

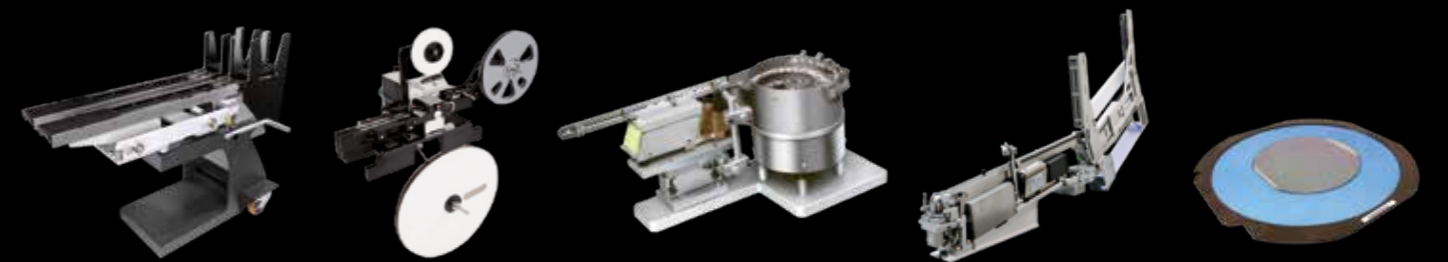

JEDEC TRAY

TAPE & REEL

BOWL

TUBE

FILM FRAME

**NEOHANDLER
modula**

